
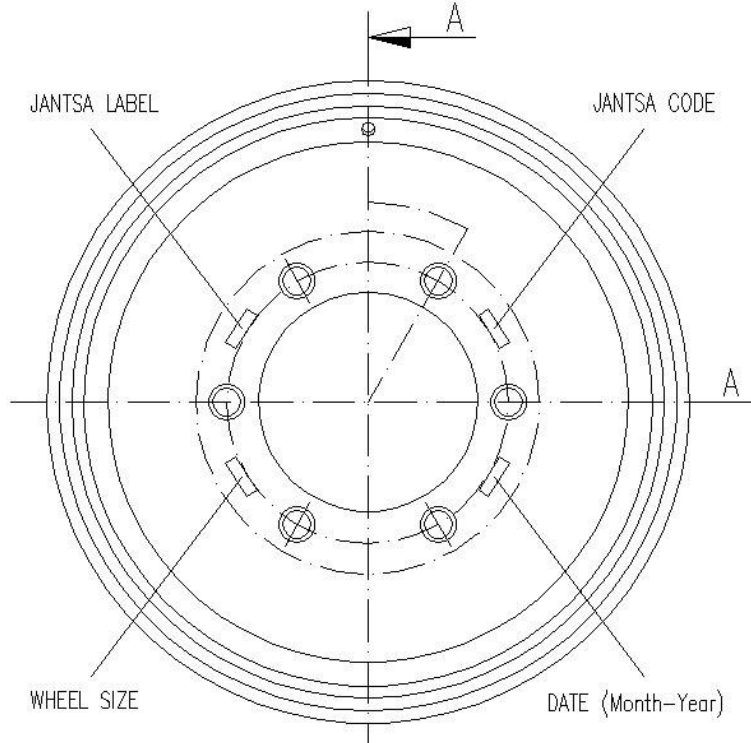


| LETTER | DESCRIPTION | REVISION | DATE | REV.NO |
|--------|---|---------------------|----------|--------|
| Ⓐ | Bore hole diameter tolerance is changed. Before +1 Now +0.2 | Drawing is changed. | 22.12.04 | 1 |

AA-SECTION

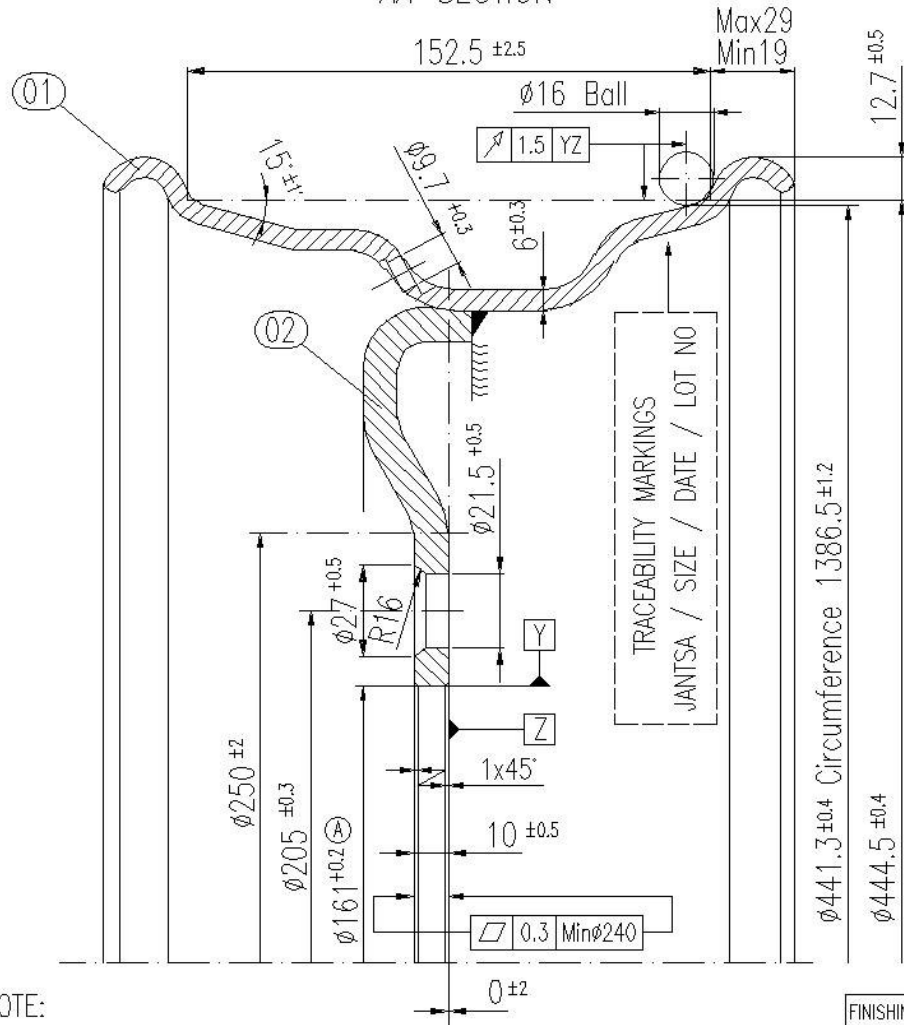

NOTE:

- 1-This rim all specifications off E.T.R.T.O. and DIN 78022.
- 2-The acceptable unbalanceness is 2000 Cmg.
Static unbalanceness is 100 gr.
- 3-Tyre size 8-9.5 R 17.5 / 215-225/75 R 17.5
- 4-Valve V3-20.4
- 5-Loading capacity 100km/h at 2000 kg.

FINISHING TOLERANCES : All surfaces marked with ∇ are to be machined unless otherwise indicated general machining tolerances:

| DISTRIBUTION | | 1) ANGULAR TOLERANCE = $\pm 0' 10'$ | | | | | |
|-------------------------|---|-------------------------------------|-------------------------------|-----------|------------|-----------|------------|
| Technical Department | 1 | | 2) DIMENSIONAL TOLERANCE (mm) | | | | |
| Production Department | 1 | | | Up to 6 | 6 to 30 | 30 to 100 | 100 to 300 |
| Quality Assurance Dept. | 1 | | | Diameter | ± 0.05 | ± 0.1 | ± 0.15 |
| INVESTMENT NO | | Length | ± 0.1 | ± 0.2 | ± 0.3 | ± 0.5 | |
| PAGE NO | | | | | | | |

| MON.NO | PCS | PART NAME | MATERIAL | CUTTING MEASURE | WEIGHT |
|--------|-----|-----------|--------------------|-----------------|--------|
| 02 | 1 | DISC | ERD 3944 / St 44-2 | - | - |
| 01 | 1 | RIM | ERD 3936 / St 37-2 | - | - |

DO NOT ADJUST THE DIMENSION FROM THE DRAWING

| | NAME | SIGNATURE | DATE |
|----------|------------|-----------|----------|
| DRAWN BY | M.KARADELI | | 04.06.98 |
| CHECKED | M.KARADELI | | 04.06.98 |
| APPROVED | C.GÜLERYÖZ | | 04.06.98 |
| SCALE | Item Name: | | |



| | | |
|---|-----------|------------|
| - | 17.5x6.00 | DRAWING NO |
| | | 600132 |